


Changes to the boost pressure line by the vehicle manufacturer

Introduction:

The vehicle manufacturer has made a technical change to the design of the boost pressure line. The turbocharger 038 253 016 D (716213-0001) was replaced by the 038 253 016 G (721021-0004)

Note:

If the older version of the turbocharger has been installed in your vehicle, the modified charge hose 1J0 145 822 E have to be used.

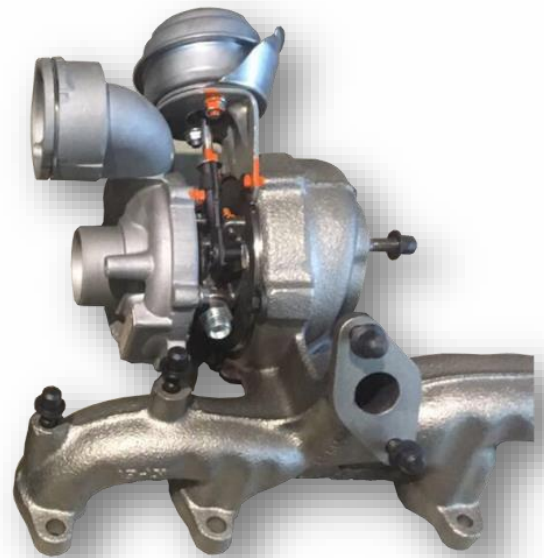

Vehicle Manufacturer: VW, Seat

Vehicle: Golf IV 1.9 TDI, Bora 1.9 TDI, Leon 1.9 TDI

Engine code: ARL

Validity: This service information is valid for renewing the turbocharger with

BTS reference: T912246 **BTS-Service-Set-Nr:** T981183

OE-no.: 038253016D, 038253016G, 03G253016R

Manufacturer part no.: 721021-5001S, 721021-5003S, 721021-5004S, 721021-5005S, 721021-5006S, 721021-5008S

Please note: OE-references are only for means of comparison. The content of this Service Information is non-binding and is only for informational purposes. The manufacturer specifications have to be adhered to.