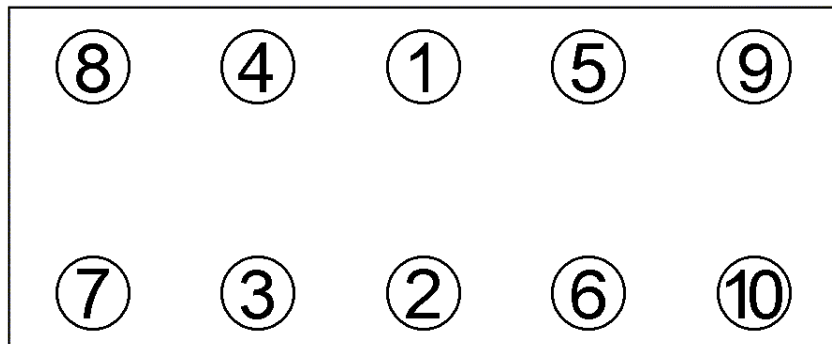


**Anziehvorschrift Zylinderkopf****Tightening Instructions for Cylinder Head****Instructions de serrage pour culasse****Prescripciones de apriete para culatas****118.051**passend für / suitable for  
adaptable à / adaptable a**Renault****Das Original**Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo

759.370

M 10x1,5x99/113

Anziehen/  
Tightening/  
Serrage/  
Apriete

1.  
 20 Nm  
 $100^\circ \pm 6^\circ$   
 3 min  
 Pos. 1-2:  
 20 Nm +  $100^\circ \pm 6^\circ$   
 Pos. 3-6:  
 20 Nm +  $100^\circ \pm 6^\circ$

2.  
 Pos. 7-10:  
 20 Nm +  $100^\circ \pm 6^\circ$

Zeichenerklärung / Explanations / Explication / Explicacion

|   |   |                              |                                |                                       |
|---|---|------------------------------|--------------------------------|---------------------------------------|
|   | neue Zylinderkopfschrauben verwenden        | use new cylinder head bolts  | utiliser des vis neuves        | emplar tornillos nuevos               |
| * | Warmlauf (80°C)                             | warm up time (80°C)          | chauffage (80°C)               | calentamiento (80°C)                  |
|   | Schrauben einzeln lösen und wieder anziehen | loosen and tighten each bolt | deserrer et serrer vis par vis | aflojar y apretar tornillo a tornillo |
|   | Setzzeit                                    | relaxation time              | durée de tassement             | tiempo de espera                      |
|   | Drehwinkel                                  | torque angle                 | angle de serrage               | ángulo de giro                        |

**Motortyp / Engine type / Type de moteur / Tipo de motor**

÷ 1,75 mm, Ø 77 mm

Mot.: E5F 710,716, E6J 700,701,706,712,  
713,718,760, E7F 700,706, E7J 624,  
626,634,635,706,718,719,720,724,  
726,728,742,745,754

R19, Clio, Kangoo, Megane, Rapid

**Elring-Serviceteam**

Fon +49 7123 724 799

Fax +49 7123 724 798

service@elring.de

24/09/05

**\*118.051\***