



# SERVICEINFORMATION

### **ADAPTER CABLE 4.07360.53.0**

## FOR REPLACING PREDECESSOR VERSIONS WITH THE LATEST EXHAUST BACK PRESSURE SENSORS






Adapter cable with accessories (item no. 4.07360.53.0)

The exhaust back pressure sensor with ref. no. 22 36 517 19R has been discontinued. This sensor was used in Renault engines. In some cases, the affected engines were also installed in Mercedes-Benz, Nissan and Dacia vehicles (see table on the back). As OE, the exhaust back pressure sensor has been replaced with a sensor that has a different connector plug. As a result, if this old, discontinued sensor fails, the original plug must be removed and replaced with a suitable one.

Exhaust back pressure sensor (item no. 7.12061.00.0)



To make it easier to replace the part, Motorservice offers the adapter cable 4.07360.53.0, which enables the discontinued exhaust back pressure sensor to be easily replaced with the suitable model 7.12061.00.0 from Pierburg.

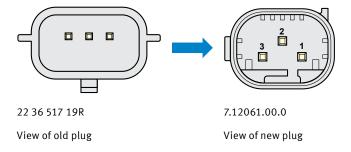

 $All \, content \, including \, pictures \, and \, diagrams \, is \, subject \, to \, change. \, For \, assignment \, and \, replacement, \, refer to \, the \, current \, catalogues \, or \, systems \, based \, on \, TecAlliance.$ 





#### PARTS ASSIGNMENT

Exhaust back pressure sensor 7.12061.00.0			
Pierburg no.	Manufacturer (excerpt)	Ref. no.	
7.12061.00.0	Renault, Dacia	22 36 517 19R	
	Mercedes-Benz	A 607 905 02 00	
	Nissan	22760-00Q0A	

Adapter cable 4.07360.53.0			
Pierburg no.	Manufacturer (excerpt)	Ref. no.	
4.07360.53.0	Renault, Dacia	82 01 428 503	
	Mercedes-Benz	A 415 540 16 01	
	Nissan	24021-00QAA	


#### **SCOPE OF SUPPLY FOR ADAPTER CABLE 4.07360.53.0**

The set for the adapter cable 4.07360.53.0 contains:

- Cable with new plug (suitable for 7.12061.00.0)
- 3 shrink-fit connectors


#### **CONVERSION MEASURE**

- Cut off the old sensor 223651719R close to the old plug.
- Connect the adapter cable 4.07360.53.0 using the shrink-fit connectors, making sure to observe the pin assignment.

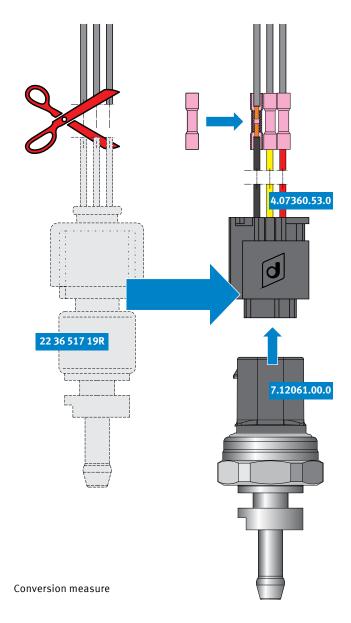

## PIN ASSIGNMENT FOR EXHAUST BACK PRESSURE SENSOR 7.12061.00.0 AND ADAPTER CABLE 4.07360.53.0

- 01 Ground (red)
- 02 Signal output (yellow)
- 03 Supply voltage (black)



View of plug of adapter cable 4.07360.53.0

