

Technical sheet / Datos técnicos:

Part number adaptable to / Referencia adaptable a	4720726280
Working pressure / Presión de trabajo	max. 11 bar
Type of current / Tipo de corriente:	Direct current / Corriente continua
Voltage / Voltaje:	24 V
Nominal current / Corriente nominal:	0.41 A
Permissible medium / Medio de funcionamiento	Air / Aire
Operating temperature range / Rango de temperatura	-40˚C to / a +80˚C
Weight / Peso	480 gr

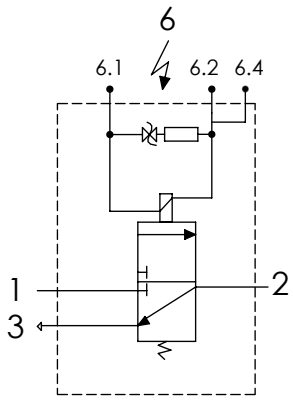

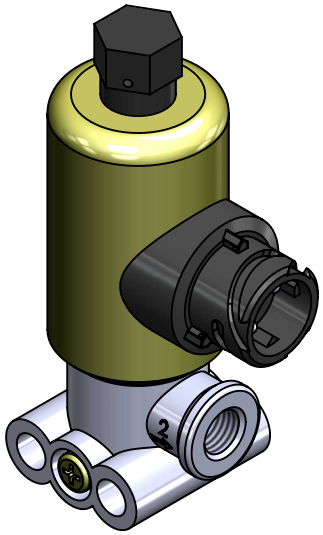

Port / Conexión	Function / Función	Thread / Rosca
1	Supply / Alimentación	M12x1.5
2	Delivery / Salida	M12x1.5
3	Exhaust / Escape	-
6	Conector / Conector	DIN 72585-A1-3.2-Sn/K1

Purpose / Propósito: Allow air flows to delivery port when the solenoid is activated / Permitir el paso de aire hacia la conexión de salida cuando se activa el solenoide.


Installation requirements / Requisitos para la instalación: The valve must be installed using 2 screws M8. / La válvula debe ser instalada usando dos tornillos M8.


Modification nº	Modified	Date	Reason
4			
3			
2			
1			


Drawn	
17/02/11 A.L.	
Checked	
17/02/11 A.M.	
General Tolerance	-
Assembly	-
Part name	Solenoid
Material	ID. Reference 2218201
-	Scale: -
	Review: 0

Comments


Sheet 1/2

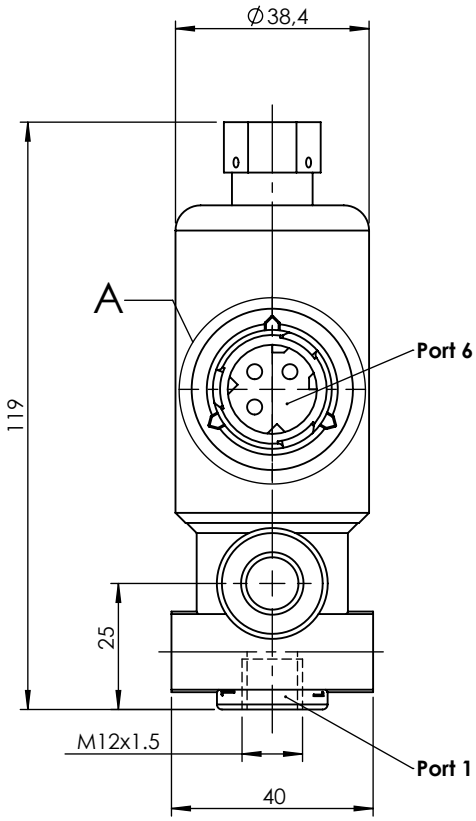

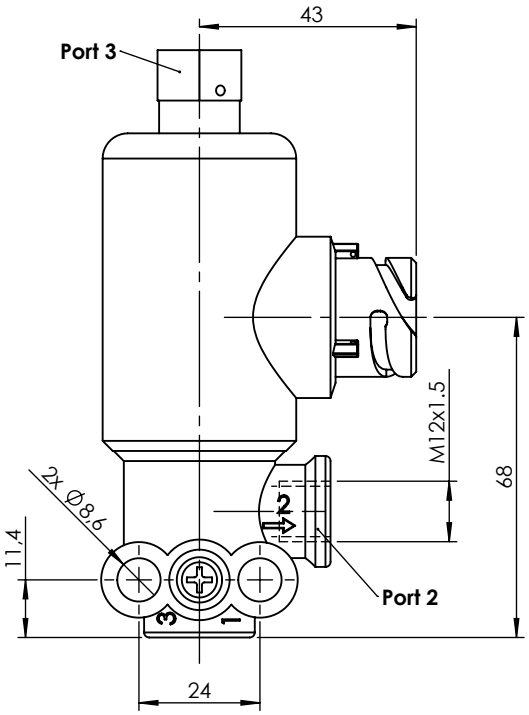

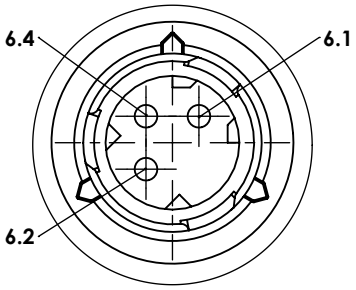

DETAIL / DETALLE A
SCALE / ESCALA 1 : 1

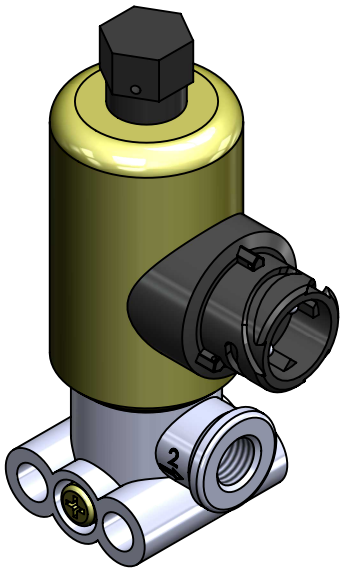

Modification							
	4					Drawn	cojali
	3					17/02/11 A.L.	
	2					Checked	
	1					17/02/11 A.M.	
	nº	Modified	Date	Reason	General Tolerance	Assembly	-
Comments					ISO 2768 c-K	Part name	Solenoid
					Material	ID. Reference	2218201
					-	Scale: 2/3	Sheet 2/2
						Review: 0	