vika®

The spare parts experts of
Volkswagen BMW Mercedes-Benz



STO
Superior To OE

Oil filter

OIL FILTER

4 Years

STO

Seal



Hydrogenated Nitrile (HNBR)

1. Good resistance to oil, coolant, and chemical corrosion.
2. Temperature range: -40℃~150℃.
3. The performance remains unchanged after high and low.




OE

Fluororubber (FKM)

1. Temperature range: -20℃-150℃. The product is not resistant to low temperature and prone to aging.
2. The product loses elasticity and sealing performance after high and low temperature test for 120H.

Filter Base

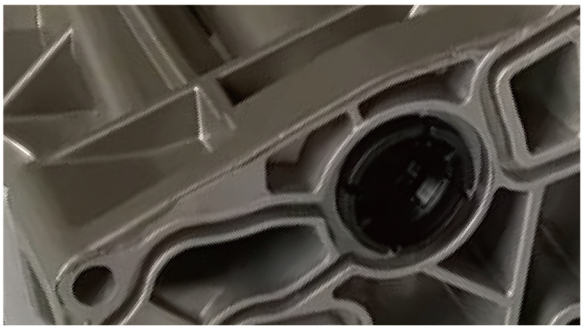

The filter base is made of ADC12 in a high-pressure casting process.
The product provides high strength and is not easily deformed. It has a service life 5 times longer than plastic.



OE

The filter base is made of PA66 and GF30% materials.
Plastic injection molding leads to low product strength, making it prone to chemical corrosion and cracking after about 5 years of use.