


# INSTALLATION INSTRUCTIONS

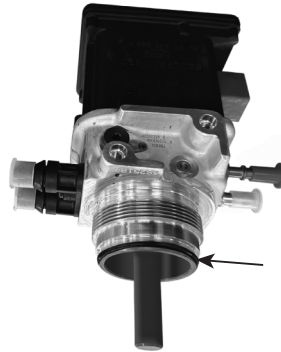

A 000 142 10 89 (MERCEDES-BENZ)



**Fig.1**

1. Install the sealing o-ring



**Fig.2**

2. Lubricate the sealing o-rings with supplied grease.



**Fig.3**

3. Install new cartridge and plastic cover to the aluminium head.



**Fig.4**

4. Tighten the plastic cover using  $80 \pm 5 \text{ Nm}$  of torque.