


PREMIUM INTAKE MANIFOLD SOLUTIONS

3×100% Leak Tests / Molecular-Level Fusion Welding /
200+ SKUs covering 90%+ mainstream models

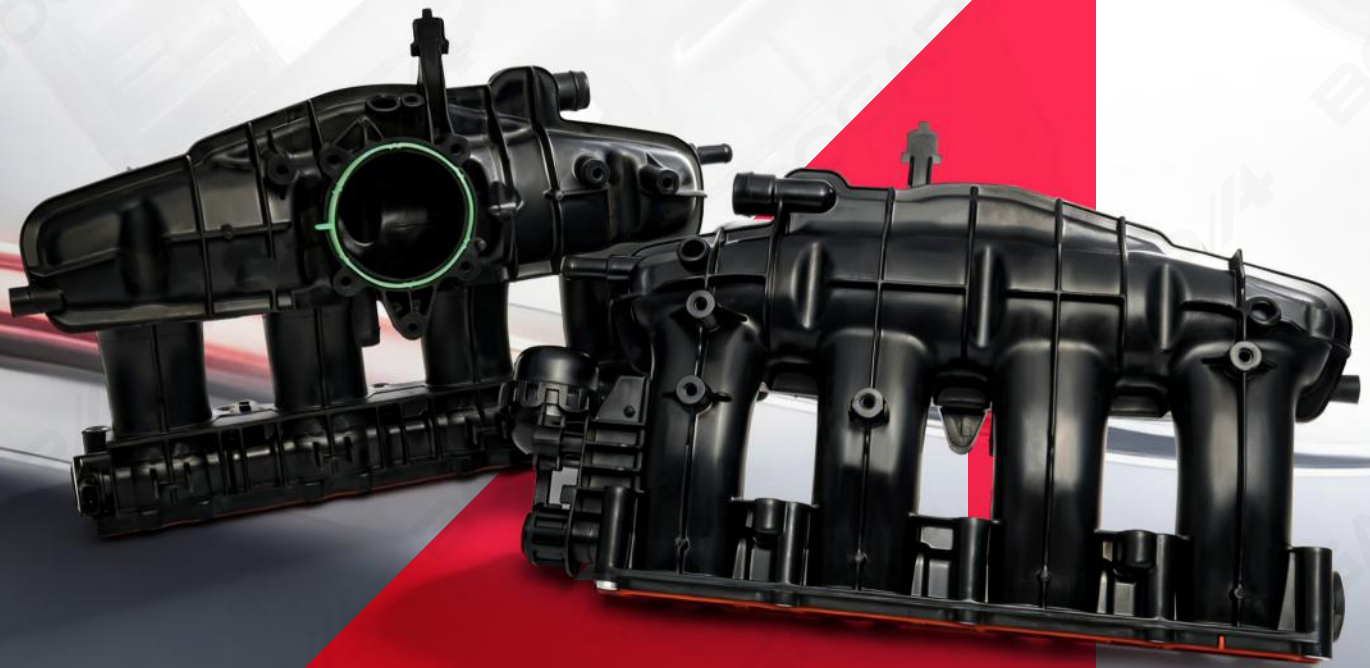

OE-Grade Virgin Material

Made from the same grade nylon-glass fiber composite as OE parts, using 100% virgin material.



Optical-Grade Smooth Inner Runners

High-precision tooling; mold core made of high-hardness hot-work die steel, CNC machined and multi-stage polished to achieve a low Ra inner surface. Key dimensions with stable, controllable CPK.



Fully Automated Vibration Friction Welding

Uses automated vibration friction welding equipment to achieve molecular-level fusion of the housing.



Three 100% Airtightness Tests Throughout Production

3-stage, 100% leak testing across the full manufacturing process.