Hengst FILTER

Desiccant Cartridge Interior and Main Sieve - Kit

T370W

Check correct assembly of main sieve (2). Incorrect assembly can cause breakdown of complete device.

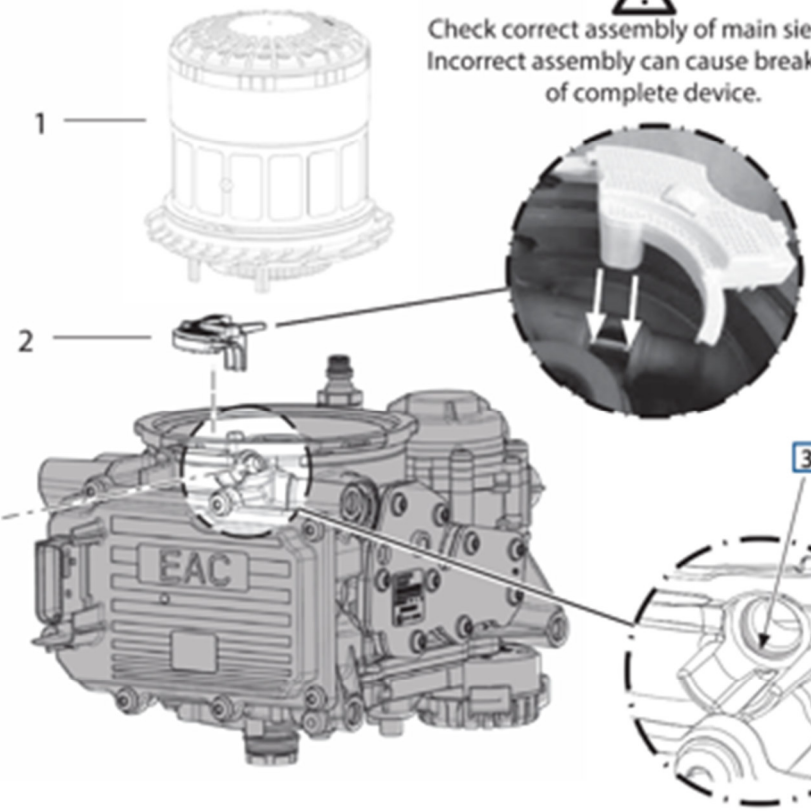

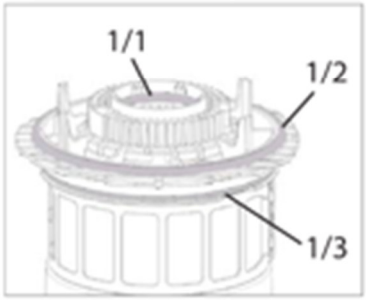

Cleaning: Clean the chamber, sealing surface, thread and sealing area of locking screw, bayonet ring, notches, inside and outside of cartridge housing.

Recommended lubricant: truck engine oil, truck gearbox oil, standard bearing grease. Used or aggressive lubricants are not allowed to use!

880602091 a