

Technical sheet / Datos técnicos:

Part number adaptable to / Referencia adaptable a	9730110010
Operating pressure / Presión de trabajo	max. 10 bar
Supply pressure / Presión de alimentación	max. 13 bar
Predominance / Predominancia	max. 0.1 bar
Permissible medium / Medio de funcionamiento	Air / Aire
Operating temperature range / Rango de temperatura	-40˚C to / a +80˚C
Weight / Peso	600 gr

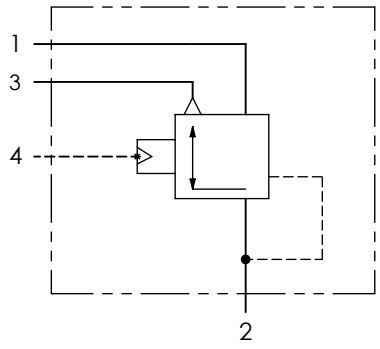

Port / Conexión	Function / Función	Thread / Rosca
1	Supply / Alimentación	M22x1.5 VOSS
2	Delivery / Salida	2x M22x1.5 VOSS
3	Exhaust / Escape	-
4	Control / Pilotaje	M16x1.5 VOSS

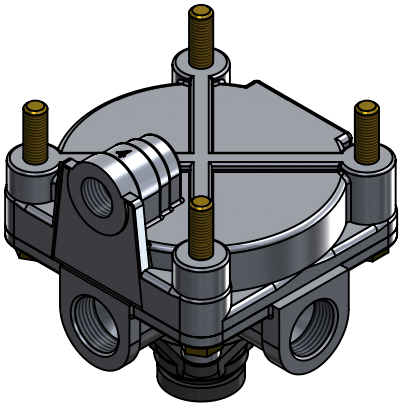

Purpose / Propósito: To rapidly supply and evacuate compressed air from pneumatic equipment and reduce response time of pneumatic braking systems. / Suministrar y evacuar rápidamente aire comprimido de equipos neumáticos y reducir el tiempo de respuesta de estos equipos.


Installation requirements / Requisitos para la instalación: Mounting is accomplished using, at least, two of four M8 mounting bolts. The valve must be installed with exhaust pointing downwards. / El montaje se realiza mediante, al menos, dos de los cuatro pernos de montaje M8. La válvula debe montarse con el escape apuntando hacia abajo.


Modification nº	Modified	Date	Reason
4			
3			
2			
1			


Drawn	
17/02/11 A.U.	
Checked	
17/02/11 A.L.	
General Tolerance	Assembly: -
-	Part name: Relay valve
Material	ID. Reference: 2226601
-	Scale: -
	Review: 0
	Sheet 1/2


Comments

cojali

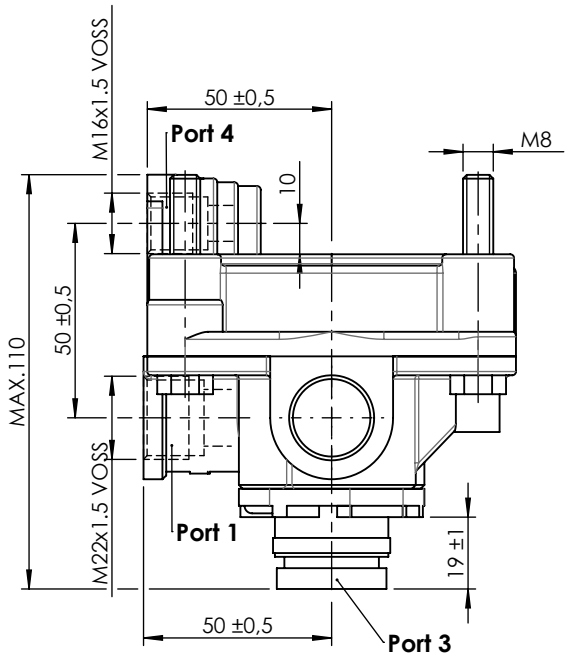

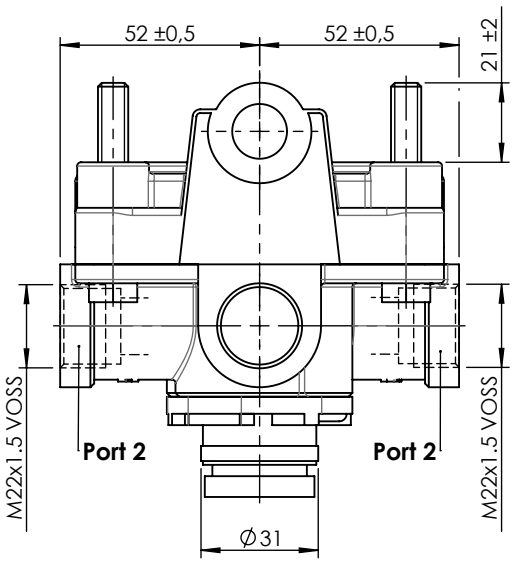

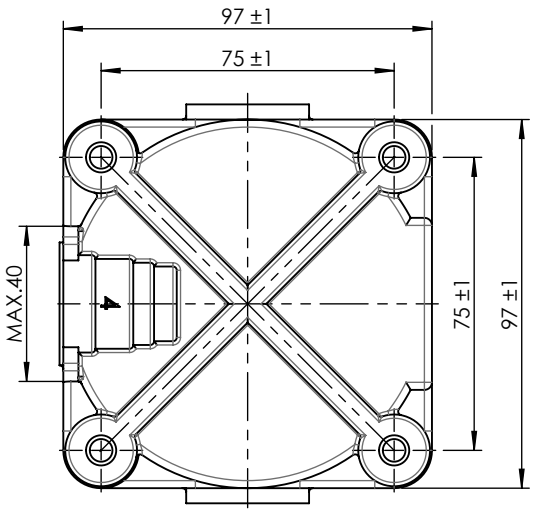

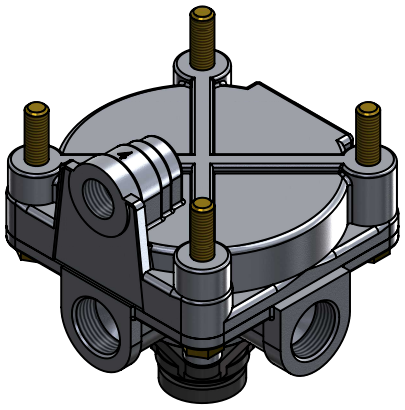

Modification							
	4					Drawn	cojali
	3					17/02/11 A.U.	
	2					Checked	
	1					17/02/11 A.L.	
	nº	Modified	Date	Reason	General Tolerance	Assembly	-
Comments					ISO 2768 c-K	Part name	Relay valve
					Material	ID. Reference	2226601
					-	Scale: 1/2	Sheet 2/2
						Review: 0	