

Technical sheet / Datos técnicos:

Part number adaptable to / Referencia adaptable a	0481009021
Outlet pressure (at a supply pressure of 18 bar) / Presión entregada (a una presión de alimentación de 18 bar)	9.5 bar
Permissible medium / Medio de funcionamiento	Air / Aire
Operating temperature range / Rango de temperatura	-40˚C to / a +80˚C
Weight / Peso	350 gr

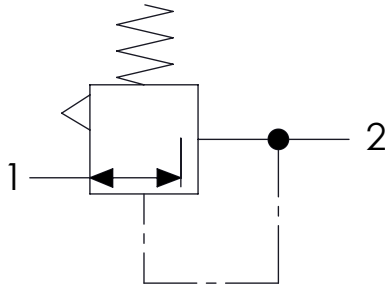

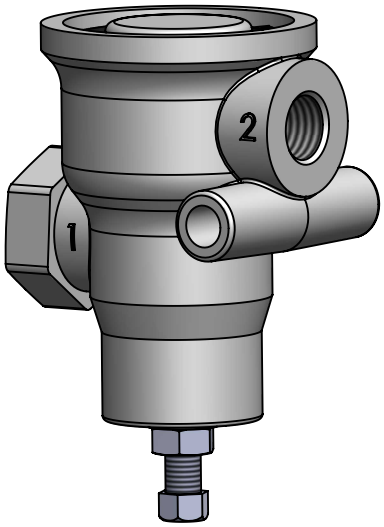



Port / Conexión	Function / Función	Thread / Rosca
1	Supply / Alimentación	M16x1.5
2	Delivery / Salida	M16x1.5
3	Exhaust / Escape	-


Purpose / Propósito: To keep a constant and limited outlet pressure. / Mantener una presión de salida constante y limitada.


Installation requirements / Requisitos para la instalación: To install the valve with the exhaust port facing downwards. The valve must be installed using one screw M8. / Instalar la vávula con el escape orientado hacia abajo. La válvula debe ser instalada utilizando un tornillo M8.

Modification nº	Modified	Date	Reason	General Tolerance	Drawn	cojali
4					Drawn	
3					05/06/14 A.U.	
2					Checked	
1					05/06/14 A.L.	
Comments				-	Assembly	-
				-	Part name	Pressure limiting valve
				Material	ID. Reference	2323108
				-	Scale: -	Sheet 1/2
					Review: 0	

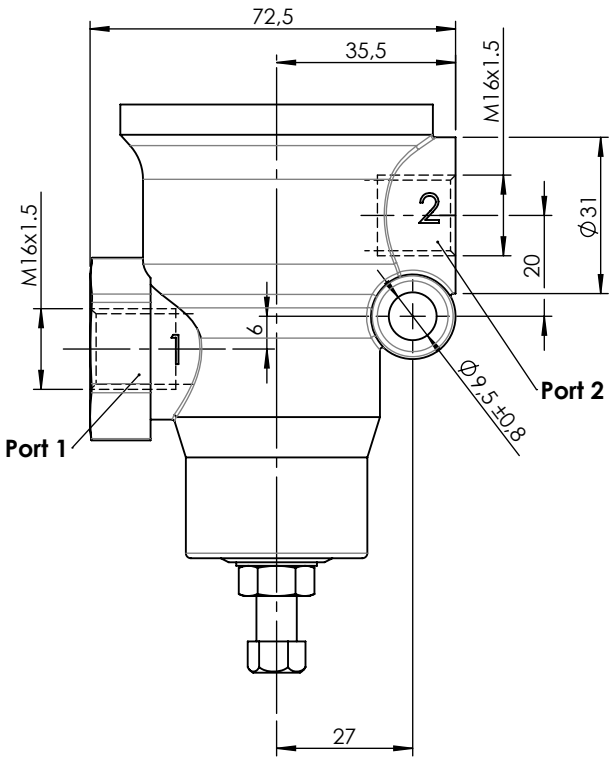

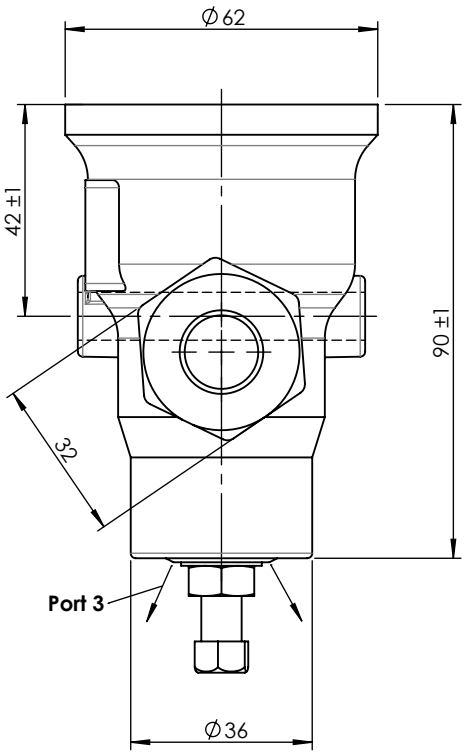

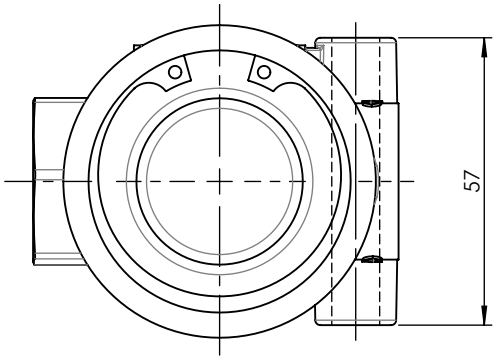

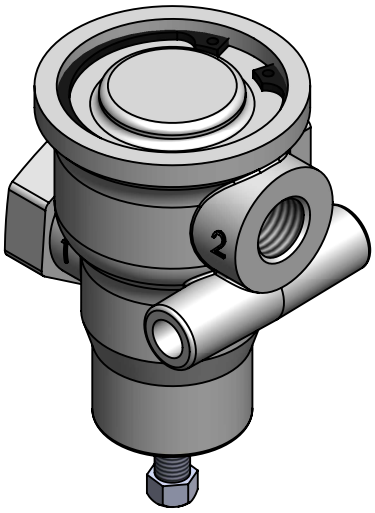

Modification							
nº	Modified	Date	Reason	General Tolerance	Assembly	-	
4					Drawn	cojali	
3					05/06/14 A.U.		
2					Checked		
1					05/06/14 A.L.		
Comments				ISO 2768 c-K	Part name	Pressure limiting valve	
				Material	ID. Reference	2323108	
				-	Scale: 2/3	Sheet 2/2	
					Review: 0		