

## Hengst E1572L and E1573L air filters for MAN applications

The Hengst E1572L and E1573L air filters for MAN applications look very similar at first glance, but what is the difference?


The E1572L air filter with normal dust collection is for use in road vehicles.

For particularly dusty applications, e.g. for construction site vehicles, the E1573L is intended with a significantly higher dust holding capacity.

We additionally recommend the E1573LS safety insert for a dusty environment so that no particles enter the intake tract when the air filter is changed.



## Dust holding capacity at OE level – Increased performance with the Hengst Flex Tape

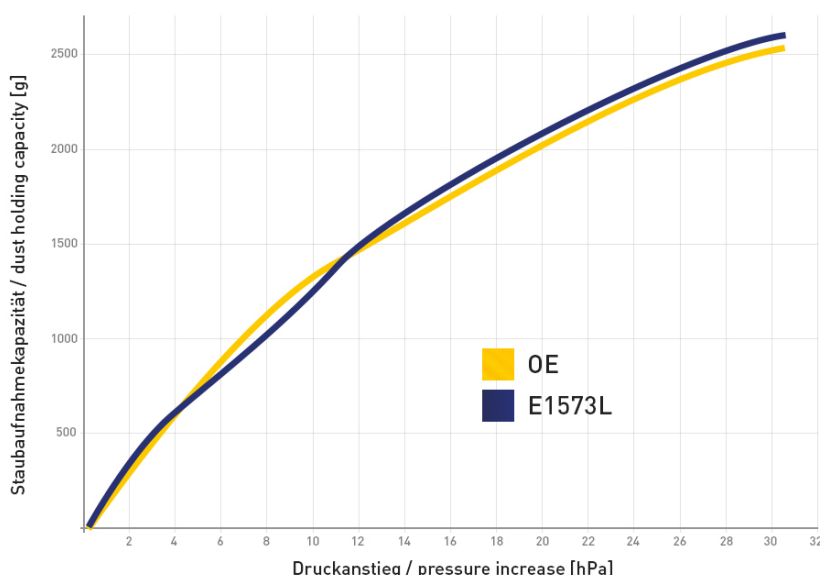

The air filters are equipped with Hengst Flex Tape.

Due to the very good stabilization, wrinkle packing is prevented and thus a uniform dust collection is ensured.

All filter applications are supplied in the usual OEM quality.

## Mounting instructions

The missing nubs on the bottom compared to the original part do not affect the performance of the filters and are not needed for installation.

The positioning arrow on the OE part also has no effect on the installation position. The air filter is inserted into the housing and the filter's high-quality PU foam reliably seals on the raw and clean sides. The engine engine circuit is thus protected from penetrating dirt particles by a by-pass.



E1572L from Hengst with MAN air filter housing

E1572L in mounting with housing cover

Complete mounting of the E1572L filter in the original housing

For transverse installations of older MAN applications, the air filter E428L01 is intended.

OE number	Manufacturer	Hengst type
81.08405-0037	MAN	E1572L
81.08405-0038	MAN	E1573L
81.08405-0016	MAN	E428L01
81.08405-0020	MAN	E428L01

Please note the unique identification by the OE number.

