
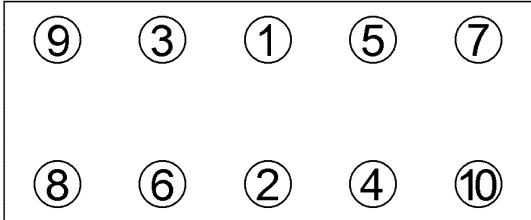


Anziehvorschrift für Zylinderkopf		199.380 passend für / suitable for adaptable à / adaptable a Nissan	 Das Original	
Tightening Instructions for Cylinder Head				
Instructions de serrage pour culasse				
Prescripciones de apriete para culatas				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
 710.020 M11x118x1,5				
Anziehen/ Tightening/ Serrage/ Apriete	* ➤ ☐ ➤ ➤	31 - 37 Nm 180° - 190° 31 - 37 Nm 90° - 95° 90° - 95°		
Zeichenerklärung / Explanations / Explication / Explicacion				
✱	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor				
Dicke/Thickness 1,15 mm 1 Loch/hole				
Mot. CD20T 2,0 ltr. Turbo-Diesel 1974 ccm SOHC 8V 55/66kW (75/90PS) Primera P11 9/1996- Primera WP11 4/1998-				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601			*199.380*	